



#### 2-4. SCHEMATIC DIAGRAM —Audio Section—

● See page 17 for note

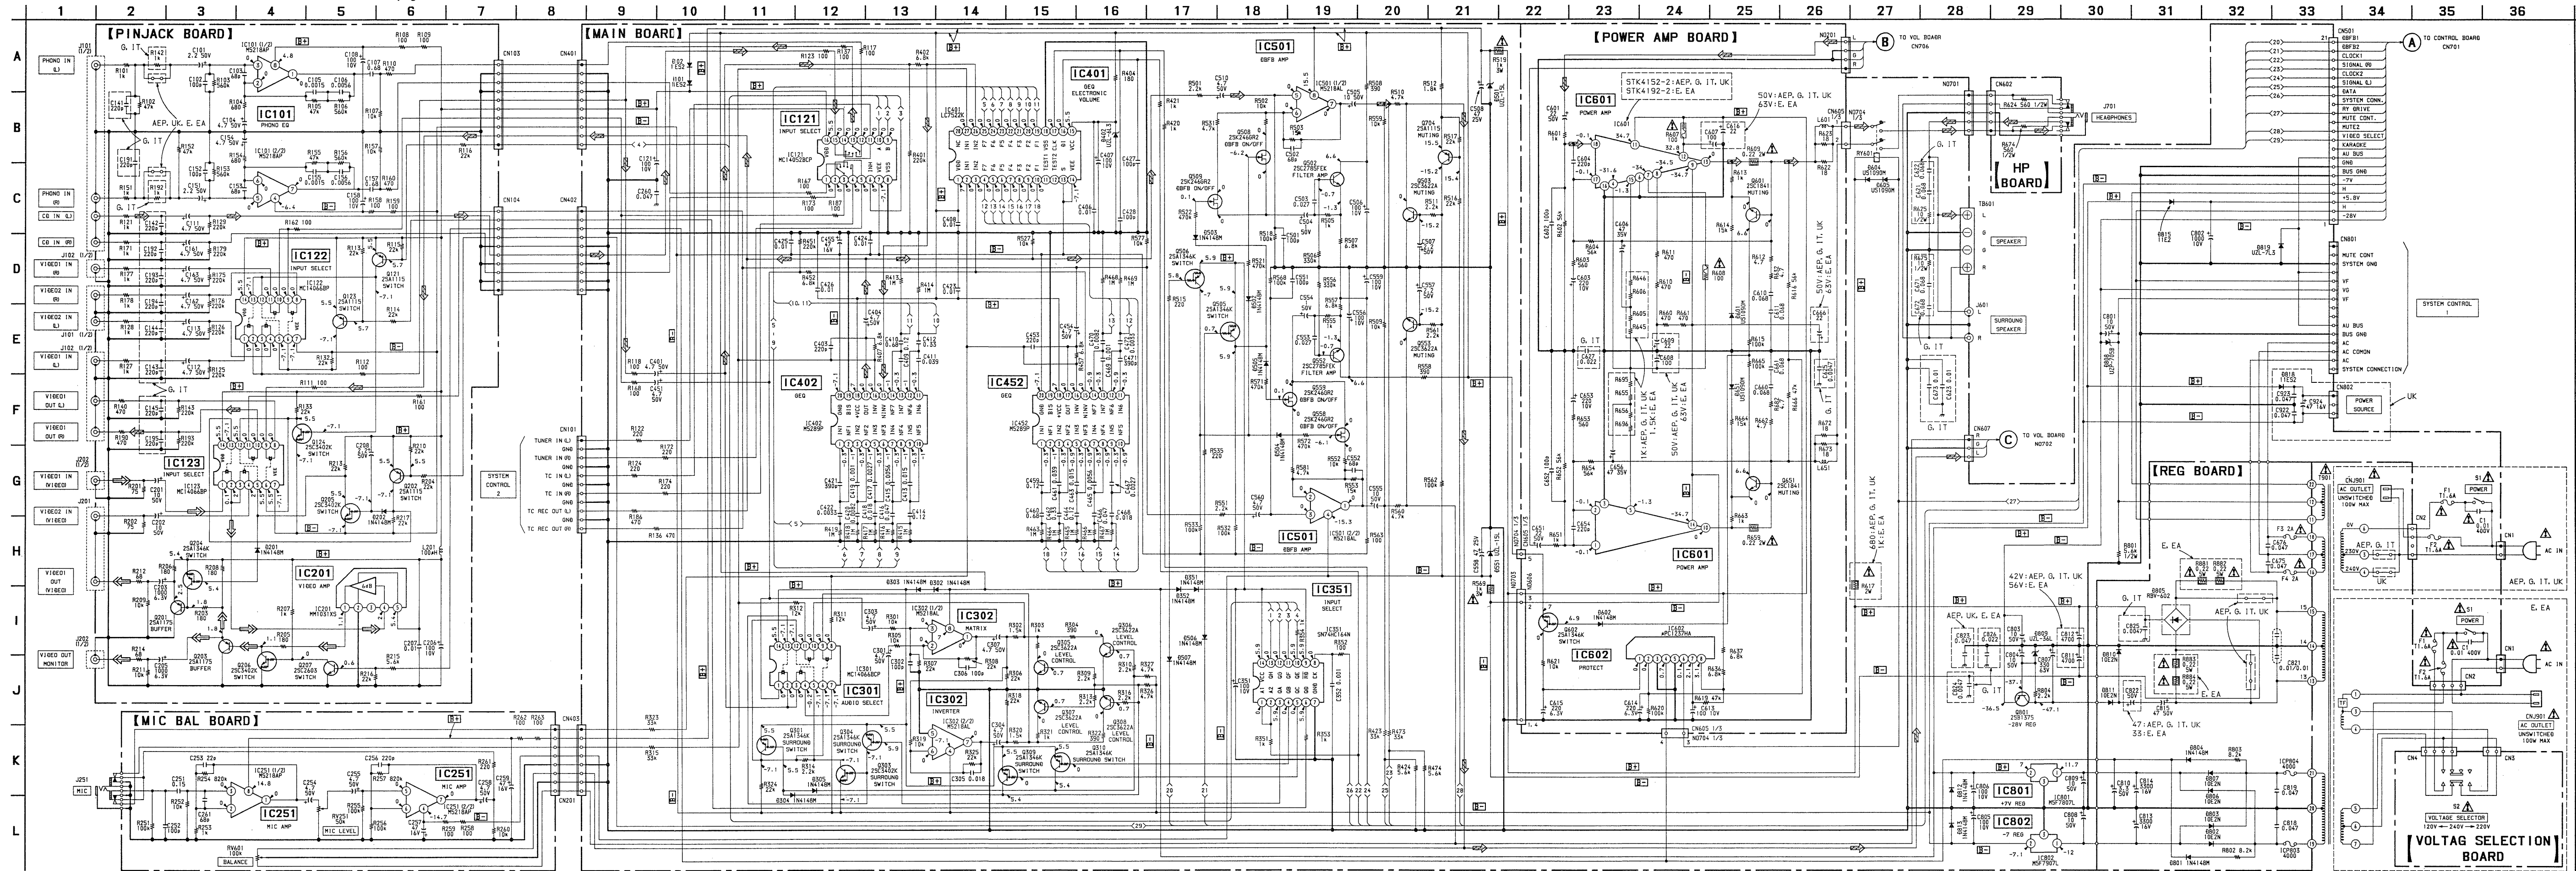

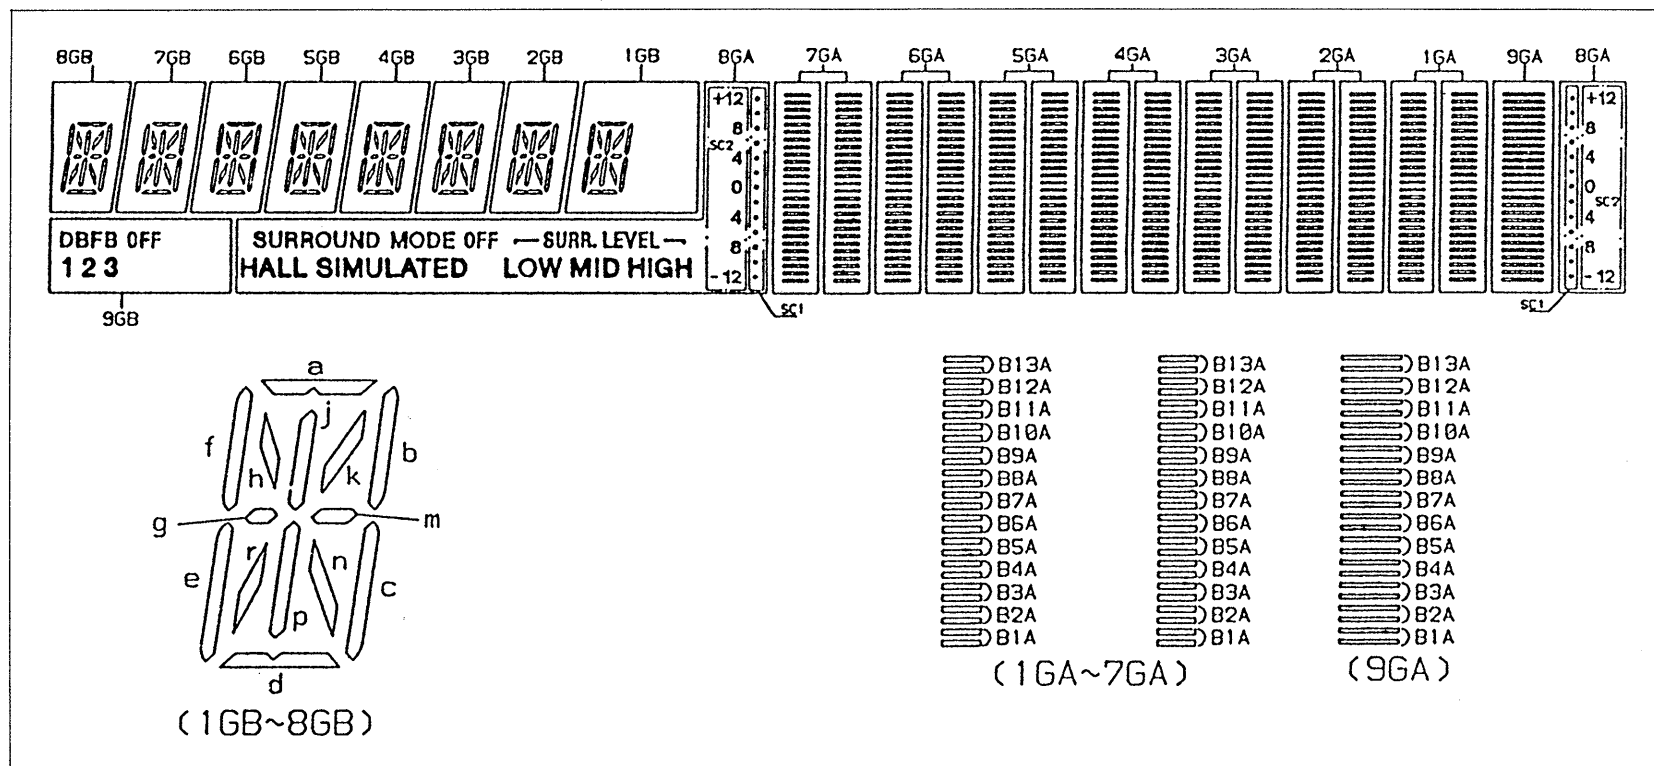

- Note:
- All capacitors are in  $\mu F$  unless otherwise noted. pF:  $\mu F$
  - 50WV or less are not indicated except for electrolytics and tantalums.
  - All resistors are in  $\Omega$  and  $\frac{1}{4}W$  or less unless otherwise specified.
  - $\Delta$ : indicates tolerance.
  - $\square$ : nonflammable resistor.
  - $\square$ : fusible resistor.
  - $\square$ : B+Line
  - $\square$ : B-Line
  - $\square$ : adjustment for repair.
  - Voltage and waveforms are dc with respect to ground under no-signal (detuned) conditions.
  - Voltages are taken with a VOM (input impedance 10M $\Omega$ ).
  - Voltage variations may be noted due to normal production tolerances.
  - Signal path:  $\Rightarrow$  CD  $\Rightarrow$  TV (PICTURE)

G: Germany  
IT: Italian  
EA: Saudi Arabia  
AUS: Australian

Note: The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety. Replace only with part number specified.

## 2-5. SCHEMATIC DIAGRAM—Control Section—

